



Protect LED Lighting Fixtures from Over/Under Voltage Burnout




Over/Under Voltage Protection Available in 3 Preset Voltages For Bullet-Proof Installation



Model: OVCD-120-HW



Model: OVCD-230-HW

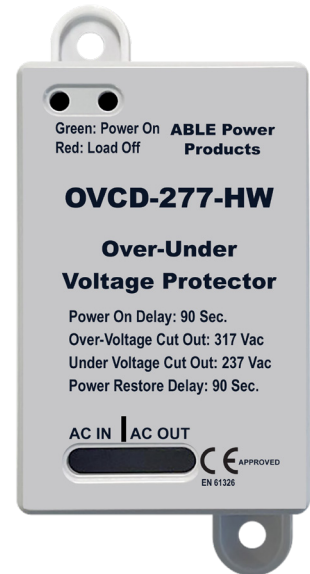

Model: OVCD-277-HW

Features

- Extends the life of your fixture by eliminating damaging over/ under voltages conditions
- Proprietor Safe Restore System™ Automatically disconnects fixture within 7ms after detecting damaging voltage levels
- Easy Installation - Cut-Strip-Connect - No splicing, wire nuts or taping required
- Small Footprint allows installation inside the fixture or can be surfaced mounted using the tab molded to enclosure
- Green Diagnostic LED confirms power and fixture are installed correctly
- Red Diagnostic LED indicates a fault condition when fixture is disconnected

Specifications

- Overvoltage Value: AC150V±5V-AC317V±5V
- Under Voltage Value: AC90V±5V-AC237V±5V
- Reset Time: 180 seconds
- Rated Frequency: 50/60
- Working Current: 5A
- Working Voltage: VAC 230
- Weight: 55 g / 2.0 oz (approx.)

Dimensions

