





## Over Voltage & Under Voltage Cut-Off with Safe Restore™

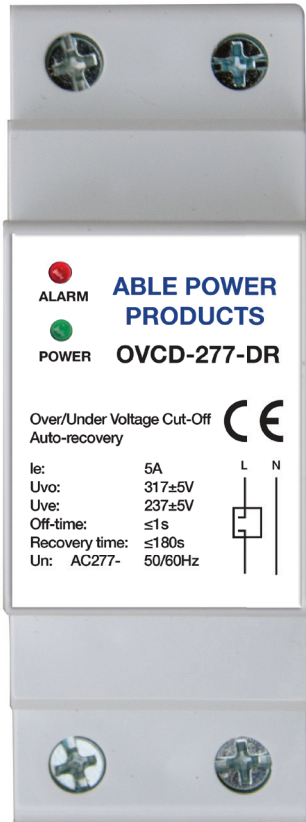

Model: OVCD-277-DR

### Features

- Dinrail Mount
- Extends the life of your fixture by eliminating temporary over/ under voltages that can harm sensitive electronic components
- Safe Restore™
  - Instant Drop on Over/Under Voltage Condition
  - When voltage returns to normal, unit auto resets
- Automatically shuts off power to the fixture when nominal voltage decreases by 40V
- Automatically shuts off power to the fixture when nominal voltage increases by 40V
- For volume purchases, we can adjust voltage settings

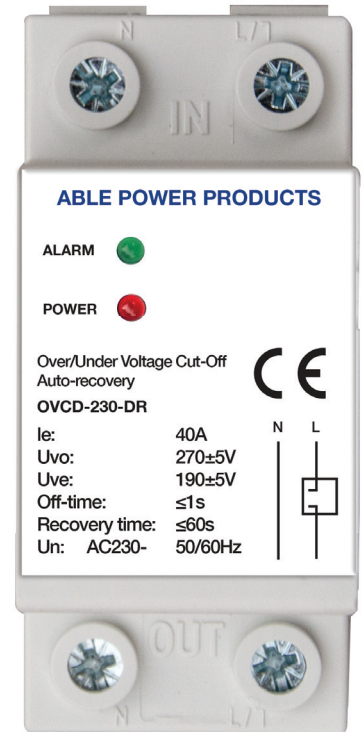

Model: OVCD-230-DR

### Specifications

- Green LED ON\*\* Denotes Input Power ON
- Red LED light ON\*\* Denotes Over/Under voltage condition
- Overvoltage value: AC317V±5V
- Under voltage value: AC237V±5V
- Reset time: 180 seconds
- Rated frequency: 50/60
- Working current: 5A
- Working voltage: VAC 277
- Weight: 158 g / 5.5 oz (approx.)

### Specifications

- Green LED ON\*\* Denotes Input power ON
- Red LED light ON\*\* Denotes Over/Under voltage condition
- Overvoltage value: AC270V±5V
- Under voltage value: AC190V±5V
- Reset time: 60 seconds
- Rated frequency: 50/60
- Working current: 40A
- Working voltage: VAC 230
- Weight: 136 g / 4.8 oz (approx.)